

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

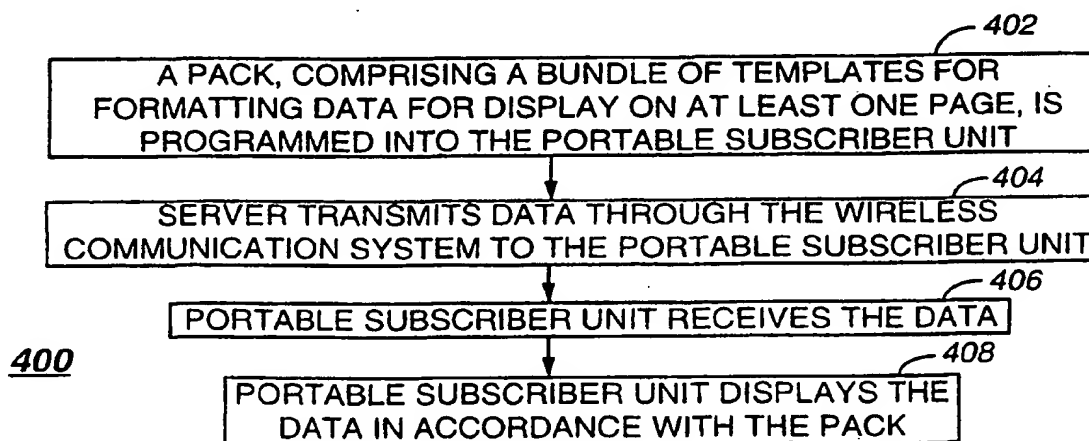


3

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/00		A1	(11) International Publication Number: WO 99/67958
			(43) International Publication Date: 29 December 1999 (29.12.99)
(21) International Application Number: PCT/US99/09231 (22) International Filing Date: 28 April 1999 (28.04.99) (30) Priority Data: 09/102,957 23 June 1998 (23.06.98) US (71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: BUCHHOLZ, Dale, Robert; 1441 East Anderson Drive, Palatine, IL 60067 (US). JANO, Bashar; Apartment 101, 1429 Albany Court, Schaumburg, IL 60193 (US). WAGNER, Kevin, Robert; 4855 Union Lake Drive, Fort Worth, TX 76137 (US). (74) Agents: BETHARDS, Charles, W. et al.; Motorola Inc., Intellectual Property Dept., 5401 North Beach Street/MS E230, Fort Worth, TX 76137 (US).		(81) Designated States: BR, CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD AND APPARATUS IN A WIRELESS COMMUNICATION SYSTEM FOR CONTROLLING A DISPLAY OF TEMPLATE DATA BY A PORTABLE SUBSCRIBER UNIT



(57) Abstract

A pack (209) is programmed (402) into a portable subscriber unit (122), the pack including a bundle of templates for formatting template data received for display on at least one page. A server (124) then transmits (404) the template data through the wireless communication system. The portable subscriber unit receives (406) the template data and displays (408) the template data in accordance with the pack.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS IN A WIRELESS COMMUNICATION
SYSTEM FOR CONTROLLING A DISPLAY OF TEMPLATE DATA BY A
PORTABLE SUBSCRIBER UNIT

5

Field of the Invention

This invention relates in general to wireless communication systems, and more specifically to a method and apparatus in a wireless communication system for controlling a display of template data by a portable subscriber unit.

10

Background of the Invention

Information services are becoming increasingly popular in the wireless service market as they can provide subscribers with up-to-date information on stocks, sports, news, and the like. To increase the value of these services it is helpful to customize them for each individual subscriber. Customization is not desirable, however, if it requires a large increase in the amount of traffic traveling over the air.

In prior art wireless communication systems, information services providers have broadcast data to an information service address which the subscriber unit uses to identify information. If the subscriber unit has the address activated in its registry, it reads and processes the data. The display of the data, however, has not been configurable by the end-user.

In a similar vein, prior art wireless communication systems have begun to support access to the Internet. Wireline techniques and protocols for Internet access have been tried in wireless systems, but have encountered problems. The technique of requesting a single WEB page (or portion of a page) and then displaying the page (or portion) before requesting another page (or another portion of the same page), as currently used in the wireline protocols, can introduce excessive latency in store-and-forward wireless systems. This is because such systems must queue each response until adequate air time becomes available to transmit the response.

One prior art technique, known as the Wireless Application Protocol (WAP), has partially addressed the latency problem by sending multiple WEB pages, for example, in a single transmission as a "deck" of "cards," each card corresponding to a page of structured content and navigation specifications. Each WAP card, however, has combined the data to be displayed, with formatting instructions used in controlling the display of the data, thereby disadvantageously causing data downloads to be larger than necessary whenever the data uses a fixed display format.

Thus, what is needed is a method and apparatus in a wireless communication system for controlling a display of data by a portable subscriber unit. In particular, what is needed is a method and apparatus that can reduce the size of data downloads and that can allow customization the display of the data according to the desires of the end-user.

Summary of the Invention

An aspect of the present invention is a method in a wireless communication system for controlling a display of template data by a portable subscriber unit. The method comprises the steps of programming a pack into the portable subscriber unit, the pack comprising a bundle of templates for formatting the template data for display on at least one page; and transmitting the template data from a server in the wireless communication system. The method further comprises the steps of receiving the template data by the portable subscriber unit, and displaying the template data in accordance with the pack.

Another aspect of the present invention is a portable subscriber unit in a wireless communication system for controlling a display of template data received from a server. The portable subscriber unit comprises a transceiver for communicating with the server to receive the template data, and a processing system coupled to the receiver for processing the template data, the processing system comprising a memory. The portable subscriber unit further comprises a user interface coupled to the processing system for

displaying the template data and for accepting an input from a user. The processing system is programmed with a pack comprising a bundle of templates for formatting the template data for display on at least one page. The processing system is further programmed to cooperate with the user interface to display the template data in accordance with the pack.

Another aspect of the present invention is a server in a wireless communication system for controlling a display of template data by a portable subscriber unit. The server comprises a communication interface coupled to a controller of the wireless communication system for communicating therewith, and a processing system coupled to the communication interface for processing information communicated through the communication interface, the processing system comprising a memory. The processing system is programmed to send a pack to the portable subscriber unit, the pack comprising a bundle of templates for formatting the template data for display on at least one page, and to transmit the template data to the wireless communication system for display by the portable subscriber unit in accordance with the pack.

Brief Description of the Drawings

FIG. 1 is an electrical block diagram of a wireless communication system in accordance with the present invention.

FIG. 2 is an electrical block diagram of a portable subscriber unit in accordance with the present invention.

FIG. 3 is an electrical block diagram of a server in accordance with the present invention.

FIG. 4 is a flow diagram depicting an operation of the wireless communication system in accordance with the present invention.

FIG. 5 is a flow diagram depicting a first programming operation of the wireless communication system in accordance with the present invention.

FIG. 6 is a flow diagram depicting a second programming operation of the wireless communication system in accordance with the present invention.

FIG. 7 is a flow diagram depicting a third programming operation of the wireless communication system in accordance with the present invention.

FIG. 8 is a flow diagram depicting a fourth programming operation of the wireless communication system in accordance with the present invention.

Detailed Description of the Drawings

Referring to FIG. 1, an electrical block diagram depicts an exemplary wireless communication system in accordance with the present invention, comprising an infrastructure portion 102 including a controller 112 and a plurality of conventional base stations 116, the communication system also including a plurality of portable subscriber units 122. The base stations 116 preferably communicate with the portable subscriber units 122 utilizing conventional radio frequency (RF) techniques, and are coupled by conventional communication links 114 to the controller 112, which controls the base stations 116.

The controller 112 is preferably a combination of the Wireless Messaging Gateway (WMG™) Administrator! paging terminal, and the RF-Conductor!™ message distributor manufactured by Motorola, Inc. The base stations 116 are preferably a combination of the RF-Orchestra! transmitter and RF-Audience!™ receiver manufactured by Motorola, Inc. The portable subscriber units 122 are preferably similar to PageWriter™ 2000 data messaging units, also manufactured by Motorola, Inc., and having software modified in accordance with the present invention. It will be appreciated that other similar equipment can be utilized as well for the controller 112, the base stations 116, and the portable subscriber units 122.

Each of the base stations 116 transmits RF signals to the portable subscriber units 122 via an antenna 118. The base stations 116 preferably each receive RF signals from the plurality of portable subscriber units 122 via the antenna 118. The RF signals transmitted by the base stations 116 to the portable subscriber units 122 (outbound messages) comprise selective call addresses identifying the portable subscriber units 122, and data messages originated by message originators, as well as commands originated by the controller 112 for adjusting operating parameters of the radio communication system, and packs for formatting the display of template data in accordance with the present invention, as described further below. The RF signals transmitted by the portable subscriber units 122 to the base stations 116 (inbound messages) comprise responses that include scheduled messages, such as positive acknowledgments (ACKs) and negative acknowledgments (NAKs), and unscheduled messages, such as registration requests and pack requests.

The controller 112 preferably is coupled by telephone links 101 to a public switched telephone network (PSTN) 110 for receiving selective call message originations therefrom. Selective call originations comprising data messages from the PSTN 110 can be generated, for example, from a conventional telephone 111 or a conventional computer 117 coupled to the PSTN 110. In addition, the controller 112 preferably is coupled through a conventional communication link 121 to the Internet 120 for acquiring information, e.g., packs and template data, from at least one server 124 also coupled to the Internet. It will be appreciated that, alternatively, the server 124 can be included as an integral portion of the controller 112.

The over-the-air protocol utilized for outbound and inbound messages is preferably selected from Motorola's well-known FLEX™ family of digital selective call signaling protocols. These protocols utilize well-known error detection and error correction techniques and are therefore tolerant to bit errors occurring during transmission, provided that the bit errors are not too numerous. It will be appreciated that other suitable protocols can be used as well.

FIG. 2 is an electrical block diagram of an exemplary portable subscriber unit 122 in accordance with the present invention. The portable subscriber unit 122 comprises an antenna 204 for intercepting an outbound message and for transmitting an inbound message. The antenna 204 is coupled to a conventional transceiver 208 for receiving the outbound message and for transmitting the inbound message. The transceiver 208 is coupled to a processing system 206 for processing the outbound and inbound messages and for controlling the portable subscriber unit 122 in accordance with the present invention. A user interface 214 preferably is also coupled to the processing system 206 for interfacing with a user. The user interface 214 comprises a conventional display 216 for displaying the inbound and outbound messages, a conventional alert element 218 for alerting the user when the outbound message arrives, and a conventional keyboard 220 for generating the inbound message and for controlling the portable subscriber unit 122. A conventional clock 207 is also coupled to the processing system 206 for supporting time keeping requirements of the portable subscriber unit 122. In addition, a conventional read-only memory (ROM) 205 is coupled to the processing system 206. The ROM 205 comprises a pack 209 for formatting template data for display on at least one page, as described further below.

The processing system 206 comprises a conventional processor 210 and a conventional memory 212, preferably a random access memory (RAM). The memory 212 comprises software elements and other variables for programming the processing system 206 in accordance with the present invention. The memory 212 preferably includes a selective call address 222 to which the portable subscriber unit 122 is responsive. In addition, the memory 212 includes a message processing element 224 for programming the processing system 206 to process messages through well-known techniques. The memory 212 further comprises a pack cache 226 for storing a pack utilized by the portable subscriber unit 122 in accordance with the present invention, as is described further below. The memory 212 also

includes a pack customization element 228 for programming the processing system 206 to customize the pack. In addition, the memory 212 includes a server access element 230 for programming the processing system 206 to allow a user to access the server 124 for creating, modifying, and
5 downloading a pack.

FIG. 3 is an electrical block diagram depicting an exemplary server 124 in accordance with the present invention. The server 124 comprises a conventional communication interface 304 for communicating with the portable subscriber unit 122 through the Internet and through the
10 infrastructure portion 102 of the wireless communication system. The communication interface 304 is coupled to a processing system 310 for controlling and communicating with the communication interface 304. The processing system 310 is also coupled to a conventional clock 336 for providing a timing signal to the processing system 310. The processing
15 system 310 comprises a conventional computer 312 and a memory, preferably a conventional mass medium 314, e.g., a magnetic disk drive, programmed with information and operating software in accordance with the present invention. The mass medium 314 comprises a conventional message processing element 320 for processing messages communicated
20 with the portable subscriber unit 122 through well-known techniques. The mass medium 314 also includes generic packs 322 that can be downloaded to the portable subscriber unit 122 for controlling the display of template data. In addition, the mass medium 314 includes custom packs 324 that have been customized by a user of the portable subscriber unit 122. The mass medium
25 314 further comprises template data 328 which is to be transmitted to the portable subscriber unit 122 and formatted for display in accordance with a pack programmed into the portable subscriber unit 122. In addition, the mass medium 314 comprises a download element 330 for programming the processing system 310 to download a pack to the portable subscriber unit
30 122. The mass medium 314 also includes a create/modify element for programming the processing system 310 to allow a user to create and modify

a pack. The mass medium 314 further comprises a refresh element 334 for programming the processing system 310 to periodically refresh the pack in a portable subscriber unit 122.

FIG. 4 is a flow diagram 400 depicting an operation of the wireless communication system in accordance with the present invention. The flow begins when a pack is programmed 402 into the portable subscriber unit 122. The pack preferably comprises a bundle of templates for formatting template data for display on at least one page. A template is a pattern utilized by the processing system 206 and the user interface 214 to lay out the presentation of information to the user. The template is created by using a template mark-up language, similar to the Hypertext Mark-up Language (HTML) used in creating World Wide Web pages. A template can, for example, define where, and in what size and color, the corresponding template data is to be displayed. The templates of the pack can be related or unrelated in form and functionality, depending upon the use for which the deck and template data are intended. A "page," as used herein, refers to a screen of displayed information. The distinction between "pack" and "template data," as used herein, is that the pack represents a bundle of templates for displaying template data, and the template data is used by the processing system 206 and the user interface 214 to fill in the templates. It will be appreciated that the pack can consist of a single template, e.g., when the amount of template data is small. It will be further appreciated that a user can have a plurality of packs stored in a plurality of locations, e.g., in the server 124, in a personal computer (not shown), in the controller 112, or in the portable subscriber unit 122 (either in the ROM 205 or in the pack cache 226).

After an appropriate pack has been programmed into the portable subscriber unit 122, the server 124 transmits 404 the template data through the wireless communication system to the intended portable subscriber unit 122. The portable subscriber unit 122 receives 406 the template data and then displays 408 the template data in accordance with the templates of the

pack. Because the pack is separated from the template data, the pack can be kept in the portable subscriber unit 122 for future reuse. Keeping the pack in the portable subscriber unit 122 advantageously reduces latency for template data that is repeatedly updated and displayed in a fixed format, e.g.,

5 information services data such as a stock report. When the pack is stored in the portable subscriber unit 122, the pack is preferably cached in the pack cache 226. It will be appreciated that, alternatively, a frequently used pack such as the pack 209, can be programmed into the ROM 205 during manufacture or upon activation of the portable subscriber unit 122, for long-
10 time use.

FIG. 5 is a flow diagram 500 depicting a first programming operation of the wireless communication system in accordance with the present invention. The diagram 500 begins with the server 124 sending 502 a generic pack to the portable subscriber unit 122. Preferably, the generic pack is

15 transmitted through the wireless communication system as a single unit.

The user of the portable subscriber unit 122 then can modify 504 the generic pack through the user interface 214 of the portable subscriber unit 122, thereby producing a custom pack. The user then returns 506 the custom pack to the server 124 for storing the custom pack. Preferably, the

20 transactions between the user and the server 124 take place through the wireless communication system. It will be appreciated that, alternatively, the transactions between the user and the server 124 can take place through a wireline network as well, when the portable subscriber unit 122 is

equipped with a conventional wireline network interface (not shown). The

25 server then downloads 508 the custom pack to the portable subscriber unit 122, preferably as a single unit transmission, whenever the server 124 sends the corresponding template data to the portable subscriber unit 122. This form of operation advantageously saves memory in the portable subscriber unit 122, but at the cost of some added latency and air link resources. It will

30 be appreciated that, alternatively, the custom pack can be stored in the

portable subscriber unit 122 for improved latency, when sufficient memory is available in the portable subscriber unit 122.

FIG. 6 is a flow diagram 600 depicting a second programming operation of the wireless communication system in accordance with the present invention. The diagram 600 begins when the user accesses 602 the server 124 from an input/output device. The input/output device can be, for example, a personal computer, a keyboard-display terminal, a display with a handwriting recognition device, a speech recognition device, or the portable subscriber unit 122, to name a few. The user then creates 604 a new pack, or alternatively, modifies a generic pack through the input/output device, thereby creating a custom pack. The server 124 then stores 606 the custom pack on behalf of the portable subscriber unit 122. The server then preferably downloads 608 the custom pack to the portable subscriber unit 122 whenever the server sends the corresponding template data to the portable subscriber unit 122. Preferably, the pack is downloaded through the wireless communication system as a single unit. It will be appreciated that, alternatively, the server 124 can download the custom pack to the portable subscriber unit 122 immediately after the user creates the custom pack, and the portable subscriber unit 122 can store the custom pack in the memory 212, when sufficient space is available therein.

FIG. 7 is a flow diagram 700 depicting a third programming operation of the wireless communication system in accordance with the present invention. The diagram 700 begins with the server checking 702 whether it is time to send a refresher pack to the subscriber unit 122. If not, the server keeps checking. When it is time to send the refresher pack, the server 124 sends 704 the refresher pack to the portable subscriber unit 122 through the wireless communication system. In response, the portable subscriber unit 122 refreshes 706 the previously saved pack in the memory 212. This technique is advantageous for updating a pack that changes frequently, and for replacing a pack that may have been lost when the portable subscriber unit 122 was powered down.

FIG. 8 is a flow diagram 800 depicting a fourth programming operation of the wireless communication system in accordance with the present invention. The diagram 800 begins with the user accessing 802 the server 124 to choose a pack. The user then selects 804 a pack from a plurality of packs stored in the mass medium 314 of the server 124. The server 124 then downloads 806 the pack to the portable subscriber unit 122. It will be appreciated that, alternatively, the server 124 can store the pack on behalf of the portable subscriber unit 122, and download the pack to the portable subscriber unit 122 each time the server 124 sends template data corresponding to the pack to the portable subscriber unit 122. When this alternative is employed, the pack preferably is downloaded through the wireless communication system as a single unit.

Thus, it should be clear from the preceding disclosure that the present invention provides a method and apparatus in a wireless communication system for controlling a display of template data by a portable subscriber unit. In particular, the method and apparatus advantageously reduces the size of data downloads by separating the template from the template data, and allows customization the display of the template data according to the desires of the end-user.

Many modifications and variations of the present invention are possible in light of the above teachings. Thus, it is to be understood that, within the scope of the appended claims, the invention can be practiced other than as described herein above.

What is claimed is:

CLAIMS

1. A method in a wireless communication system for controlling a display of template data by a portable subscriber unit, the method
5 comprising the steps of:
programming a pack into the portable subscriber unit, the pack comprising a bundle of templates for formatting the template data for display on at least one page;
transmitting the template data from a server in the wireless
10 communication system;
receiving the template data by the portable subscriber unit; and
displaying the template data in accordance with the pack.
2. The method of claim 1,
15 wherein the programming step comprises the steps of:
sending a generic pack from the server to the portable subscriber unit;
modifying, by a user, the generic pack in the portable subscriber unit, thereby producing a custom pack;
20 returning the custom pack to the server for storing the custom pack; and
downloading the custom pack from the server along with transmitting the template data.

3. The method of claim 1, wherein the programming step comprises the steps of:

- accessing the server, by a user, from an input/output device;
- performing, by a user, one of creating and modifying the pack
- 5 through the input/output device, thereby producing a custom pack;
- storing the custom pack in the server; and
- downloading the custom pack from the server along with transmitting the template data.

10 4. The method of claim 1, wherein the programming step comprises the steps of:

- sending the pack from the server to the portable subscriber unit; and
- 15 caching the pack in the portable subscriber unit.

5. The method of claim 1, wherein the programming step comprises the steps of:

- sending a refresher pack from the server to the portable subscriber unit on a periodic basis; and
- 20 refreshing a previously saved pack stored in the portable subscriber unit, in response to receiving the refresher pack.

6. The method of claim 1, wherein the programming step comprises the step of:

- 25 storing the pack in a read-only memory of the portable subscriber unit.

7. The method of claim 1, wherein the programming step comprises the step of:

selecting, by a user, the pack from a plurality of packs stored in the server; and

5 thereafter, downloading the pack to the portable subscriber unit.

8. The method of claim 1, wherein the programming step comprises the step of

10 programming the pack into the portable subscriber unit, the pack consisting of a single template for formatting the template data for display on one page.

9. A portable subscriber unit in a wireless communication system for
15 controlling a display of template data received from a server, the portable subscriber unit comprising:

a transceiver for communicating with the server to receive the template data;

a processing system coupled to the transceiver for processing
20 the template data, the processing system comprising a memory; and

a user interface coupled to the processing system for displaying the template data and for accepting an input from a user,

wherein the processing system is programmed with a pack comprising a bundle of templates for formatting the template data for
25 display on at least one page, and

wherein the processing system is further programmed to cooperate with the user interface to display the template data in accordance with the pack.

10. The portable subscriber unit of claim 9, wherein the processing system is further programmed to:

cooperate with the transceiver to receive a generic pack from the server;

5 cooperate with the user interface to allow the user to modify the generic pack, thereby producing a custom pack;

cooperate further with the transceiver to return the custom pack to the server for storing the custom pack; and

10 cooperate further with the transceiver to download the custom pack from the server along with the template data.

11. The portable subscriber unit of claim 9, wherein the processing system is further programmed to:

15 cooperate with the user interface and the transceiver to allow access to the server by the user;

cooperate further with the user interface and the transceiver to allow the user to create or modify the pack through the user interface, thereby producing a custom pack;

20 cooperate with the server to store the custom pack in the server; and

cooperate further with the transceiver to download the custom pack from the server along with the template data.

12. The portable subscriber unit of claim 9, wherein the processing system is further programmed to:

25 cooperate with the transceiver to receive the pack from the server; and

cache the pack in the memory.

13. The portable subscriber unit of claim 9, wherein the processing system is further programmed to:

cooperate with the transceiver to receive a refresher pack from the server, the refresher pack transmitted from the server on a periodic basis;

5 and

refresh a previously saved pack stored in the memory, in response to receiving the refresher pack.

14. The portable subscriber unit of claim 9, further comprising

10 a read-only memory, and

wherein the processing system is further programmed to:

store the pack in the read-only memory.

15. The portable subscriber unit of claim 9, wherein the processing

15 system is further programmed to:

cooperate with the user interface and the transceiver to allow the user to select the pack from a plurality of packs stored in the server; and download the pack to the portable subscriber unit after the user selects the pack.

20

16. A server in a wireless communication system for controlling a display of template data by a portable subscriber unit, the server comprising:

a communication interface coupled to a controller of the wireless communication system for communicating therewith; and

5 a processing system coupled to the communication interface for processing information communicated through the communication interface, the processing system comprising a memory,

wherein the processing system is programmed to:

10 send a pack to the portable subscriber unit, the pack comprising a bundle of templates for formatting the template data for display on at least one page; and

transmit the template data to the wireless communication system for display by the portable subscriber unit in accordance with the pack.

15

17. The server of claim 16,

wherein the processing system is further programmed to:

20 send a generic pack to the portable subscriber unit, the generic pack to be modified in the portable subscriber unit by a user, thereby producing a custom pack;

receive the custom pack from the portable subscriber unit for storing in the memory; and

download the custom pack to the portable subscriber unit along with the template data.

18. The server of claim 16, wherein the processing system is further programmed to:

provide access to the server, by a user, from an input/output device;

5 allow a user to perform one of creating and modifying the pack through the input/output device, thereby producing a custom pack;

store the custom pack in the memory; and

download the custom pack to the portable subscriber unit along with the template data.

10

19. The server of claim 16, wherein the processing system is further programmed to

send a refresher pack to the portable subscriber unit on a periodic basis.

15

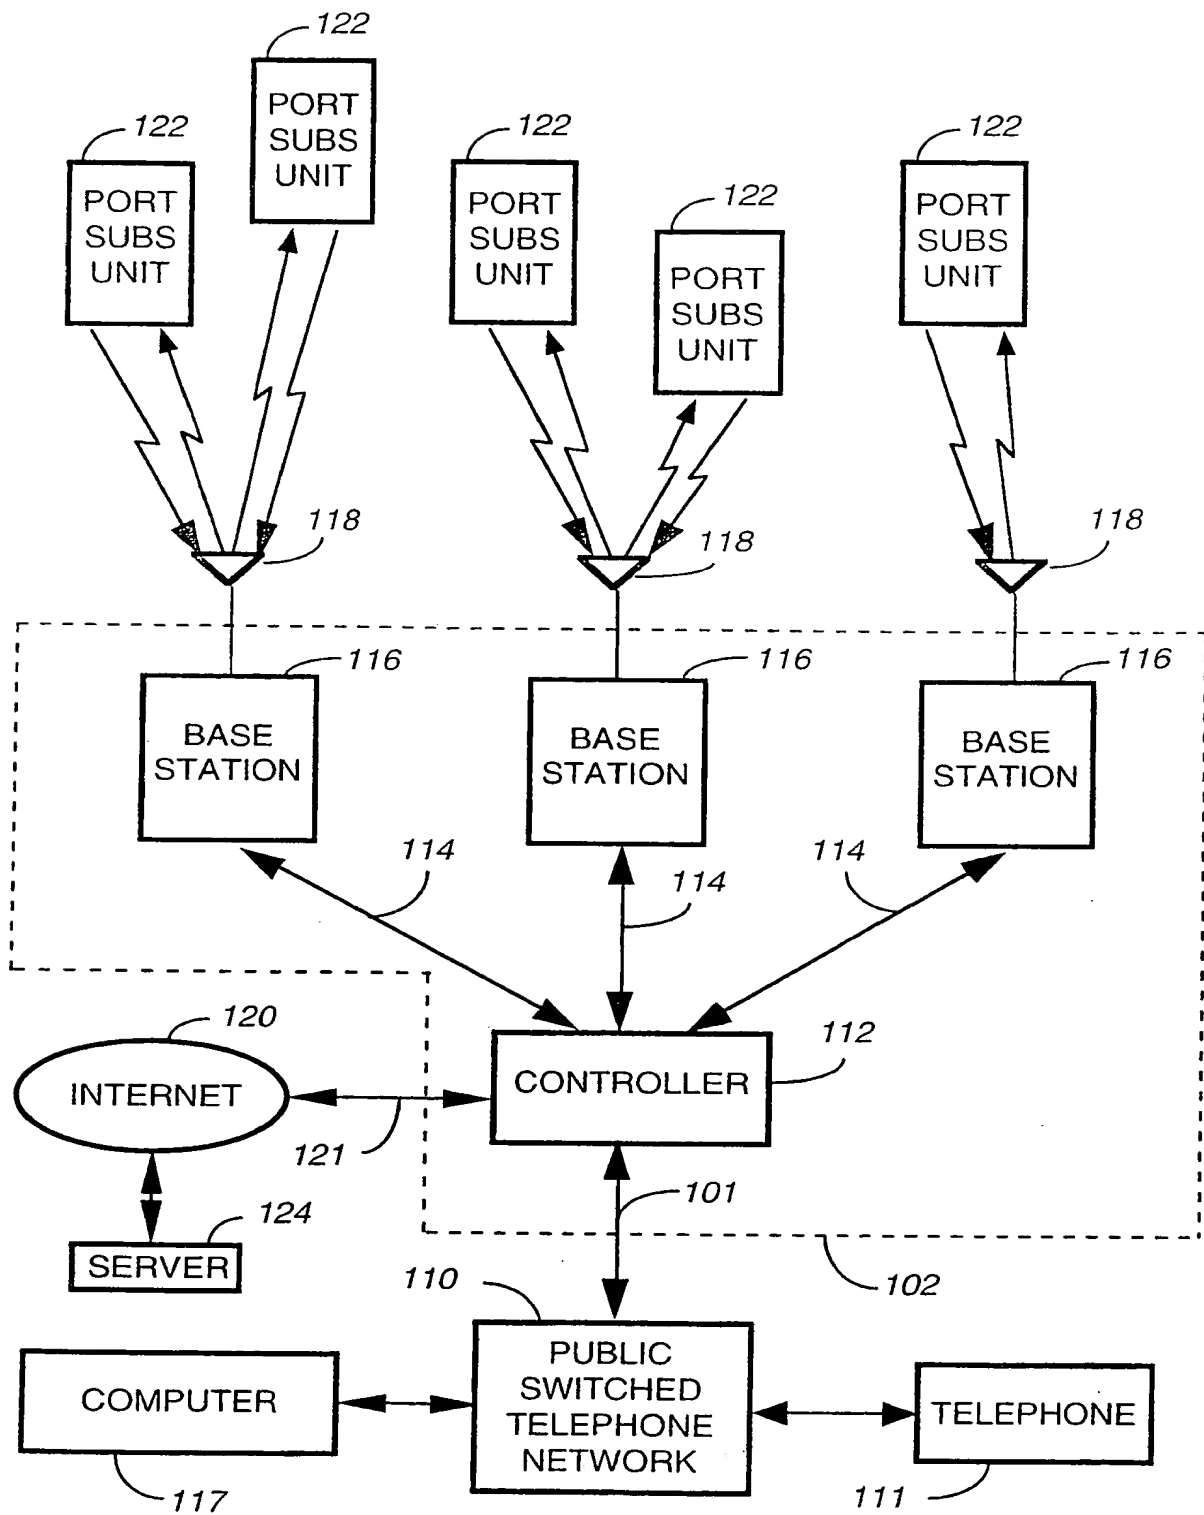
20. The server of claim 16, wherein the processing system is further programmed to:

allow selection, by a user, of the pack from a plurality of packs stored in the memory; and

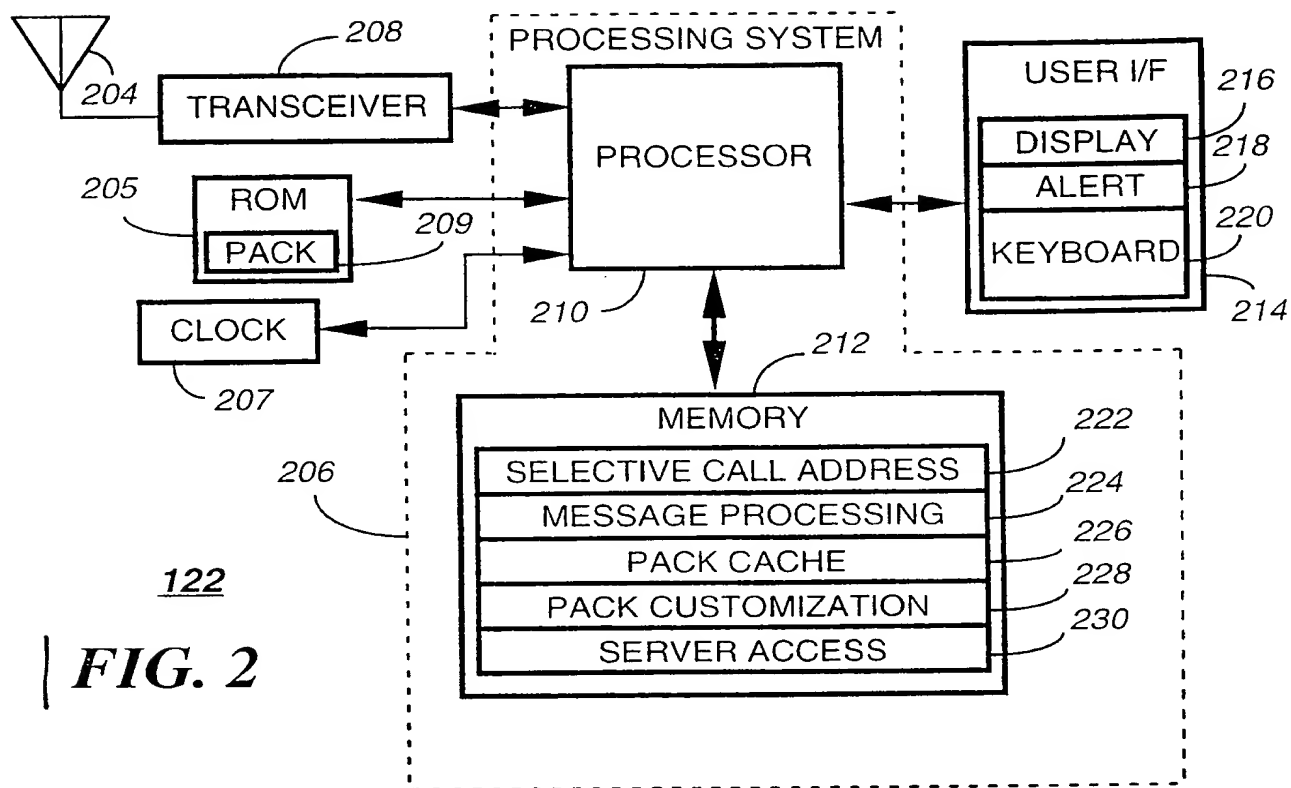
20

thereafter, download the pack to the portable subscriber unit.

1/4

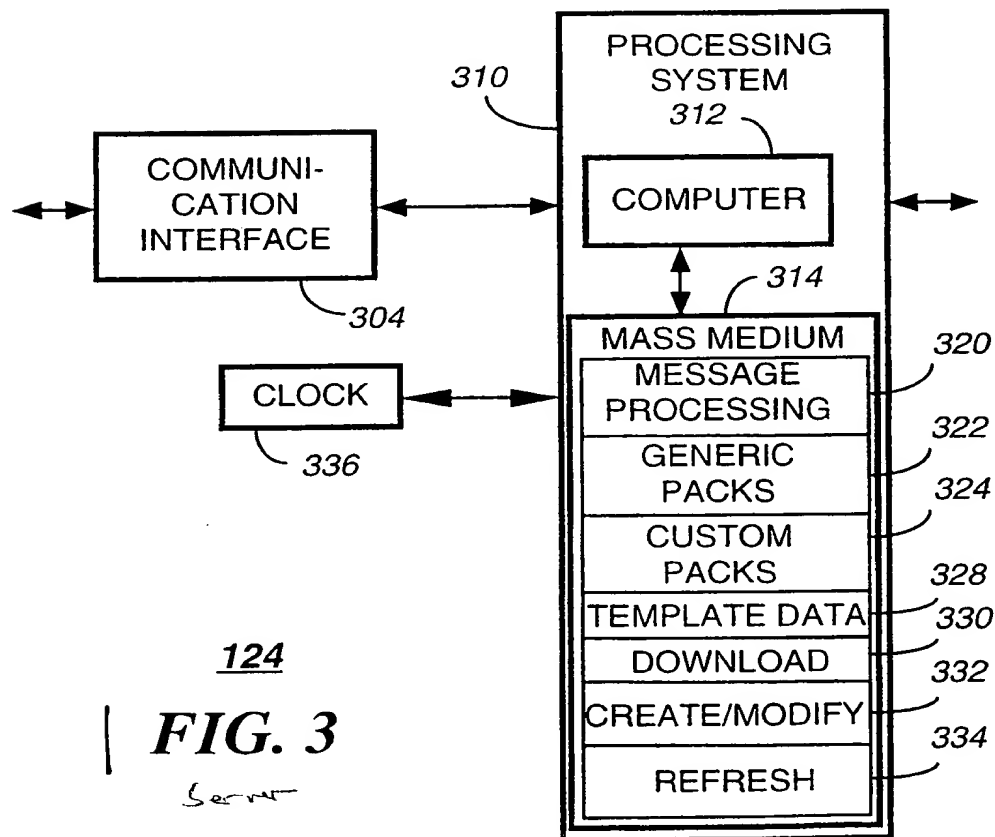
**FIG. 1** ||

2/4



122

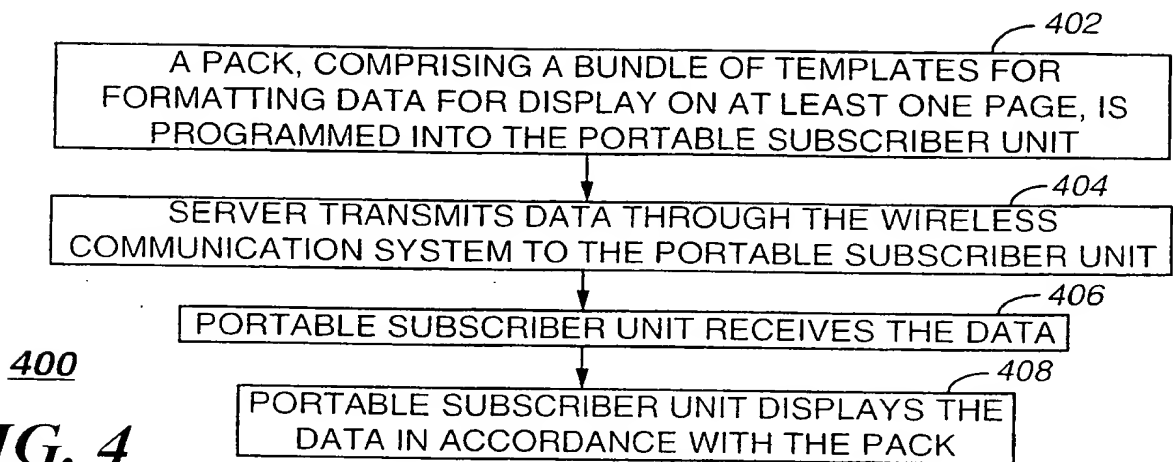
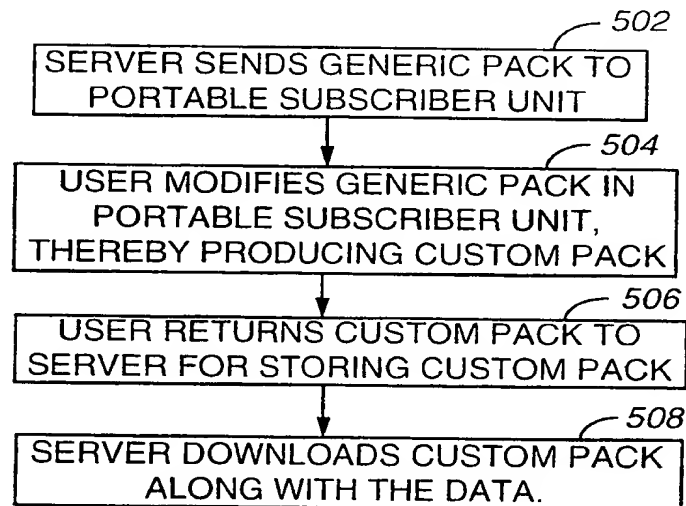
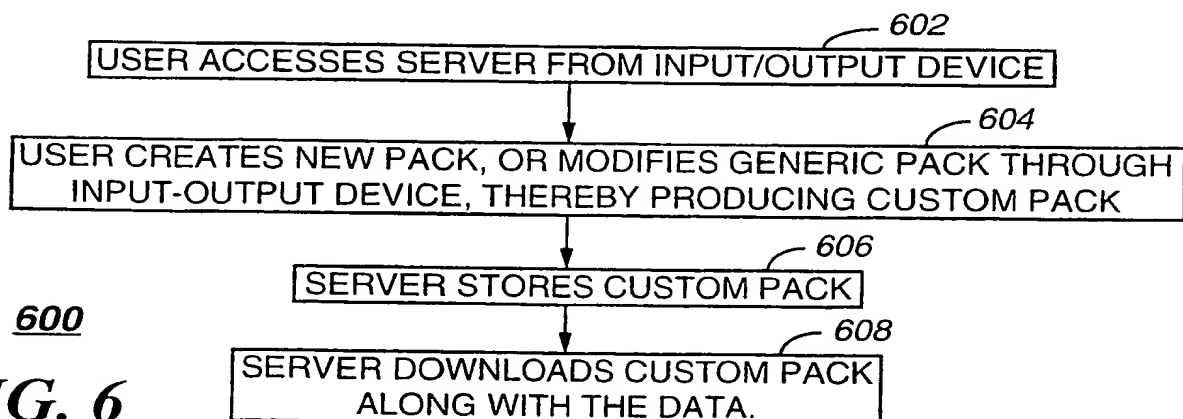
FIG. 2



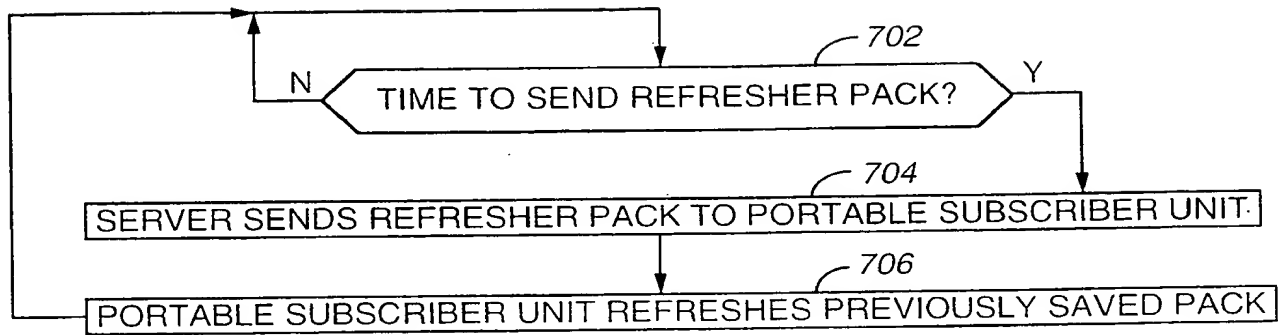
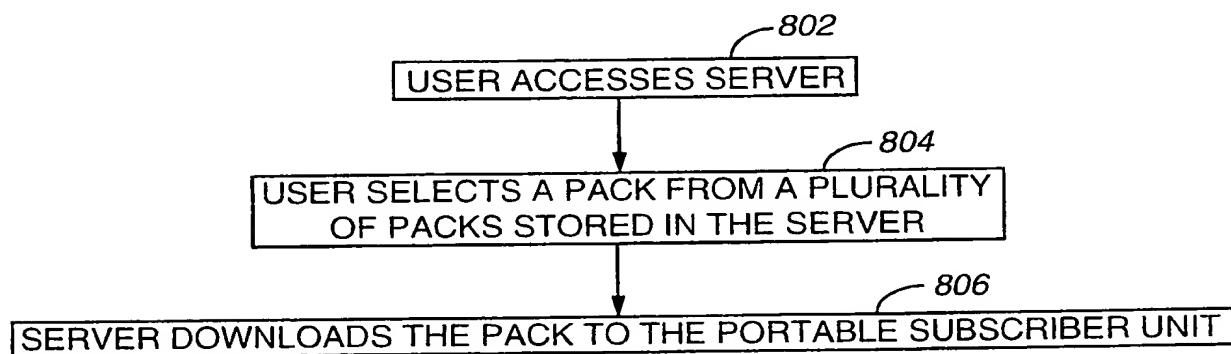
124

FIG. 3

Server

FIG. 4**FIG. 5****FIG. 6**

4/4

700**FIG. 7**800**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/09231

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04Q 7/00

US CL : 455/418

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 455/418, 419, 420, 517, 550, 575; 370/310, 328, 522

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,321,737 A (PATSIOKAS) 14 June 1994, figures 2-3, col. 2, lines 30-32, 46-52 & 60-65, col. 3, lines 18-21.	1, 4, 5, 7-9, 12 & 14-16
A, P	US 5,896,566 A (AVERBUCH et al) 20 April 1999, abstract.	1, 9 & 16
A, P	US 5,909,437 A (RHODES et al) 01 June 1999, abstract.	1, 9 & 16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents	*T* Inter document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*&* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

03 NOVEMBER 1999


Date of mailing of the international search report

18 NOV 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer


HUY D. VU

Telephone No. (703) 308-6602